



## SR-P672 Series 315W~340W Poly Module

Module Type

SR-P672315	SR-P672330
SR-P672320	SR-P672335
SR-P672325	SR-P672340



**WARRANTY**

- 12years Defect warranty
- 25years Leading linear performance warranty

Established in 2006, Sunrise Energy Co., Ltd specializes in research, development, and sales of solar PV modules in early stage, and is one of the first PV companies which involved in solar project investment and solar system integration. Our business scope covers solar project investment, EPC, project design, installation, operation and maintenance, solar products manufacturing and sales as well.

Sunrise has 35,000m<sup>2</sup> automatic workshops with 600MW annual capacity which strongly support its exploring business abroad. Sunrise has 8 offices worldwide. Sunrise has been built up long term business relationship with many well-known companies. We have been invested and built over 600MW solar projects worldwide and supplied high efficient and green solar power solution over 50 countries, such as German, Italy, Australia, Japan, India, America and China.

- 0~3% Positive tolerance
- PID-free
- 3.2mm high transmission, low iron tempered AR glass
- Better performance under low light environment
- Withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- 25 year leading linear performance warranty



IEC 61215 / IEC 61730  
ISO 9001: 2008

ISO14001: 2004  
OHSAS 18001: 2007

# 72 Cells Poly Module




Module Type		SR-P672315		SR-P672320		SR-P672325		SR-P672330		SR-P672335		SR-P672340	
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Tolerance	(%)	0~+3		0~+3		0~+3		0~+3		0~+3		0~+3	
Module Efficiency	(%)	16.2		16.5		16.7		17		17.3		17.5	
Maximum Power	P <sub>max</sub> (W)	315	232	320	236	325	239	330	243	335	247	340	251
Open Circuit Voltage	V <sub>oc</sub> (V)	45.59	42	45.91	42.1	46.21	42.2	46.37	42.3	46.38	42.4	46.41	42.5
Short Circuit Current	I <sub>sc</sub> (A)	8.99	7.23	9.07	7.32	9.14	7.41	9.25	7.5	9.38	7.6	9.50	7.7
Maximum Power Voltage	V <sub>m</sub> (V)	37.09	33.7	37.22	33.8	37.39	33.9	37.5	34	37.53	34.1	37.58	34.2
Maximum Power Current	I <sub>m</sub> (A)	8.5	6.89	8.6	6.98	8.7	7.05	8.8	7.15	8.93	7.25	9.05	7.34
Cell Type	(mm)	156×156 Poly-Crystalline Silicon											
Number of Cells	(Pcs)	72(6×12)											
Maximum System Voltage	(V)	DC1000											
Temp. Coeff. of Voc	(%/°C)	-0.33											
Temp. Coeff. of Isc	(%/°C)	0.055											
Temp. Coeff. of P <sub>m</sub>	(%/°C)	-0.44											
Operating Temperature	°C	-40 to 85											
Nominal Operating Cell Temperature (NOCT)	°C	45±2											
Max. Series Fuse	(A)	15											
Pressure Bearing	(Pa)	5400											
Wind Bearing	(Pa)	2400											

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1m/s


## ENGINEERING DRAWINGS

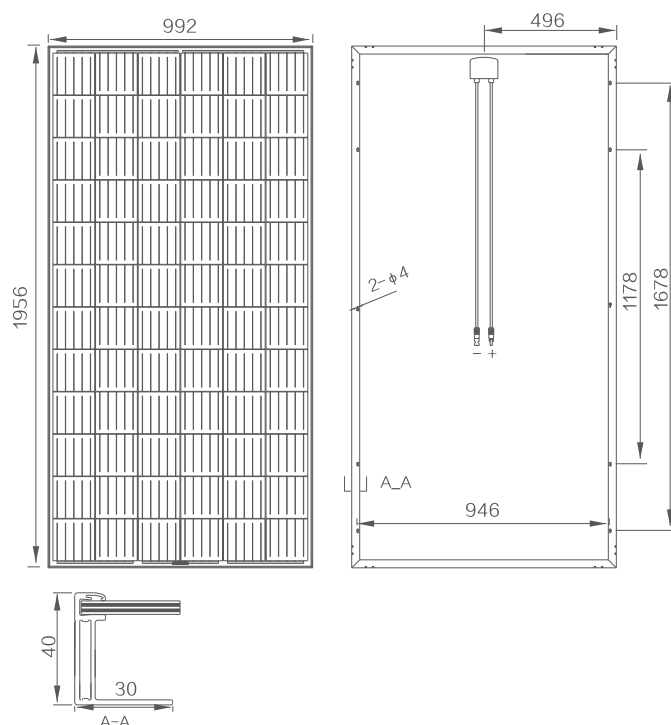


## MATERIAL DETAILS

Frame	Anodized aluminum (Silver/Black optional)
Glass	3.2mm high transmission tempered AR glass
Cell	6×12 pcs 156.75mm poly solar cell
Junction Box	Rated Current≥13A, IP≥67, TUV&UL
Cable&Connector	4mm <sup>2</sup> , MC4 or MC4 compatible

## IV CURVES

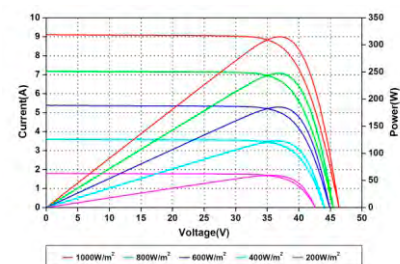

Current-Voltage and Power-Voltage Curves at Different Irradiances

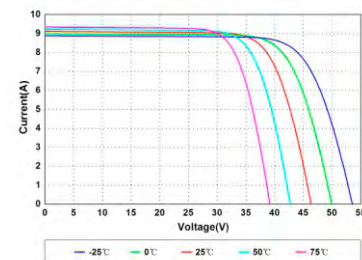

Current-Voltage Curves at Different Temperatures

## PACKING DETAILS

Dimension	(mm)	1956×992×40
Weight	(kg)	22.4
Loading Capacity		240 pcs/20' GP 572 pcs/40' HC
Packing	pcs/pallet	26